


# UPC-3002

## Type Approved Serial Line Splitter

Input: RS-232, RS-422, NMEA0183

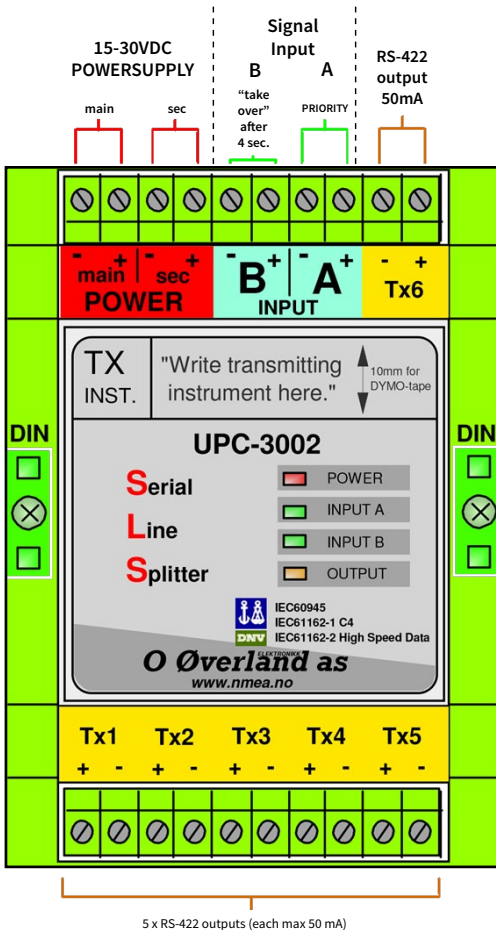

### UPC3002 Specification:

UPC3002 is a serial line splitter with two separate inputs and six outputs. Dual power input with auto switch.

Two separate data inputs A and B; with A as the primary input. If there is data on both A and B inputs, input A is used. Input B is used only if input A is idle.

The power supply and both inputs are galvanic isolated from the outputs.

### Specification:


- Power - main:** 15-30V DC, 2W
- Power - secondary:** 15-30V DC, 2W
- Input A & B:** 1-20V, 0,5mA min.
- Speed:** 1Mbps.
- Outputs 1-6:** RS-422, 50mA max  
(Outputs are Short-Circuit Protected)

Module-box with DIN-rail mounting  
Dimensions in mm: L-130 x H-50 x W-80




Marina Mile Business Park, Fort Lauderdale, Florida - USA  
2800 West State Road 84, Suite 101, Fort Lauderdale, Florida 33312  
Phone : 954 583 5700 \* Fax : 954 583 3699 \* Email: sales@scansys.no

# UPC-3002

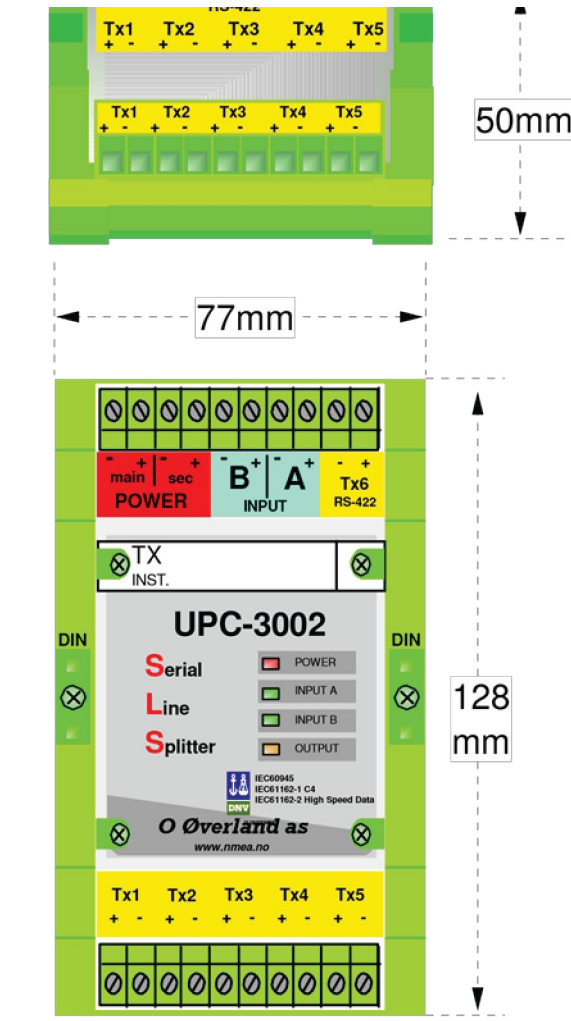

# SLS- Dimensions

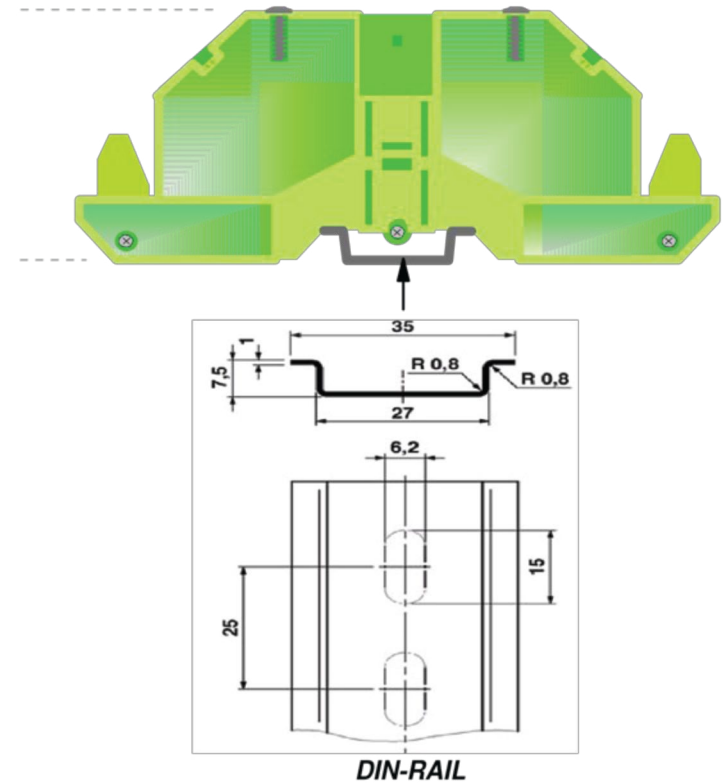

Marina Mile Business Park, Fort Lauderdale, Florida - USA  
 2800 West State Road 84, Suite 101, Fort Lauderdale, Florida 33312  
 Phone : 954 583 5700 \* Fax : 954 583 3699 \* Email: sales@scansys.no